

LIBRARY OFFICE RENOVATION MANCHESTER HIGH SCHOOL

134 EAST MIDDLE TURNPIKE
MANCHESTER, CT

Architect's Project No. 2014-103A

ISSUED FOR BID
MAY 18, 2015

SUPERINTENDENT OF SCHOOLS
MATTHEW GEARY

ARCHITECT

FRIAR ASSOCIATES INC.
281 FARMINGTON AVENUE
FARMINGTON, CONNECTICUT 06032

INDEX OF DRAWINGS

COVER SHEET

REFERENCE


R1.1 REFERENCE, SCHEDULES, DETAILS & NOTES

ARCHITECTURAL


D1.1 DEMOLITION PLAN, DEMO CEILING PLAN & NOTES

A1.1 FLOOR PLAN, CEILING PLAN, NOTES & DETAILS

A2.1 INTERIOR ELEVATIONS, DETAILS & SCHEDULES

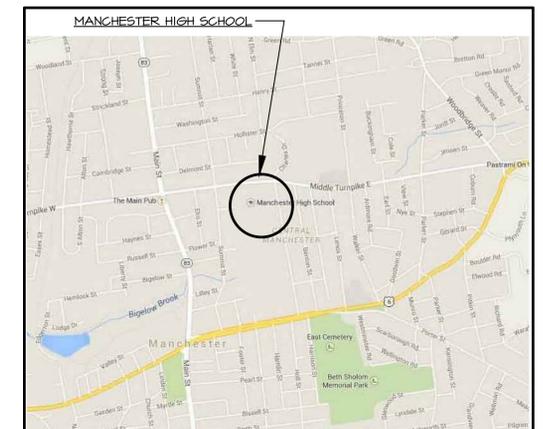

SITE LOCATION MAP

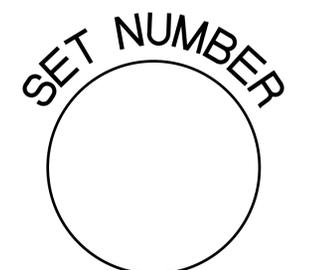

ELECTRICAL MOUNTING HEIGHTS

ALL DIMENSIONS ARE TO THE CENTER OF THE DEVICE UNLESS OTHERWISE NOTED.

RECEPTACLES: 18" A.F.F. (AT LOCATIONS ABOVE CASEWORK, MOUNT BOTTOM OF RECEPTACLE AT 2" ABOVE BACKSPASH, AT LOCATIONS BELOW CASEWORK, MOUNT AT 24" A.F.F.)

WIREMOLD: 24" A.F.F. (AT LOCATIONS ABOVE CASEWORK, MOUNT BOTTOM OF WIREMOLD AT 2" ABOVE BACKSPASH)

SWITCHES: 48" A.F.F.

DATA / PHONE OUTLETS: 18" A.F.F.

TV OUTLETS: 18" A.F.F. OR 18" BELOW FINISHED CEILING*

* FIELD VERIFY CEILING HEIGHTS WITH COORDINATION DRAWINGS

MICROPHONE WALL JACK : 18" A.F.F.

FIRE ALARM VISUAL/AUDIO INDICATING UNITS: 6'-8" TO BOTTOM OF UNIT

EMERGENCY CALL SWITCH: 36" A.F.F.

EMERGENCY CALL BELL / LIGHT: +/- 1'-6" A.F.F., CENTER ABOVE DOOR

WALL MOUNTED EXIT SIGNS: 1'-6" A.F.F.

POWER GENERAL NOTES

- ALL RECEPTACLES AND COVER PLATES SHALL BE WHITE IN COLOR.
- ALL CONDUITS SHALL BE CONCEALED IN WALLS AND OUTLET BOXES SHALL BE FLUSH WITH FINISHED WALL UNLESS OTHERWISE NOTED. ALL WORK SHALL BE IN STRICT ACCORDANCE WITH NATIONAL ELECTRIC CODE AND ALL LOCAL CODES AND ORDINANCES.
- ALL NEW WORK SHALL BE INSTALLED CONCEALED, UNLESS OTHERWISE NOTED.
- CONTROLS AND OPERATING MECHANISMS, THE HIGHEST OPERABLE PART OF ALL CONTROLS, DISPENSERS, RECEPTACLES AND OTHER OPERABLE EQUIPMENT SHALL BE PLACED WITHIN 48" OF THE FLOOR BUT NOT LOWER THAN 15" IF FORWARD APPROACHED AND WITHIN 54" BUT NOT LOWER THAN 4" IF SIDE APPROACHED.
- ELECTRICAL AND TELEPHONE WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH ALL FEDERAL, STATE AND CITY ELECTRICAL CODES, AND CONSTRUCTION GUIDELINES.
- G.C. SHALL PROVIDE 3/4" CONDUIT STUB TO EACH TELEPHONE AND DATA OUTLET BOX AND TO ANY OTHER EQUIPMENT THAT WOULD REQUIRE A CABLE FEED FROM OUTLET TO IT RACK. STUB CONDUIT TO ABOVE ACCESSIBLE CEILING. ALL CONDUITS TO INCLUDE DRAG LINES. ALL MC CABLE AND CONDUIT RUNS BY G.C. FOR LIGHTING, POWER, TELEDATA OR LOW VOLTAGE TO EMERGE FROM FURRED-OUT WALLS, CEILING SPACES OR NEW PARTITIONS, AND BE RUN IN A CLEAN, MINIMAL LAYOUT.
- ALL RECEPTACLES ARE TO BE GROUNDED AND TO RECEIVE STANDARD 3-PRONG PLUGS, UNLESS VOLTAGE, AMPERAGE OR SPECIFIC NOTATION CALLS FOR A SPECIFIC TYPE OF RECEPTACLE.
- SHOULD JOB CONDITIONS REQUIRE RELOCATION OF PLANNED TELEPHONE OR ELECTRICAL OUTLETS FOR ANY REASON, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT FOR APPROVAL OF ALTERNATIVE LOCATION PRIOR TO THE START OF WORK.
- G.C. SHALL PROVIDE ALL THE REQUIRED DRAWINGS, COMPLETED PAPER WORK AND CERTIFICATES OF INSPECTION FOR ALL THE REQUIRED MECHANICAL ENGINEERING SYSTEMS (SPRINKLER, ELECTRIC, FIRE SAFETY, ETC.) AS REQUIRED FOR LOCAL BUILDING DEPARTMENT APPROVALS.
- CONTRACTOR SHALL PROVIDE CONDUIT STUBS AND PULL CORDS FOR TELEPHONE/DATA CABLES. TELEPHONE/DATA CABLES SHALL BE INSTALLED BY THE TOWN OF MANCHESTER'S PREFERRED CONTRACTOR FROM THE OUTLETS TO THE TELEPHONE AND DATA RACKS.

TYPICAL ELECTRICAL/ DATA & POWER NOTES

20AMP, 120V, ISOLATED GROUND/DEDICATED CIRCUIT QUADRAPLEX RECEPTACLE (HUBBELL #16-5362) FOR COMPUTER. DO NOT INSTALL WITH ANY OTHER CIRCUITS. RUN 2 #12 THHN, 1 #12 G AND #12 I.G. IN 3/4" CONDUIT BACK TO PANEL. TERMINATE INSULATED ISOLATED GROUND AT PANEL EQUIPMENT GROUND BAR.

TYPICAL IN-WALL ELECTRICAL RECEPTACLES SHALL BE 20AMP, 120V, DUPLEX RECEPTACLE MOUNTED IN WALL, COORDINATE WITH CABINETRY AT 18" AFF. PROVIDE WHITE RECEPTACLE WITH WHITE COVER PLATE. CIRCUIT TO PANEL AS INDICATED.

TELEPHONE/DATA OUTLET. RUN TWO (2) 1" CONDUITS (WITH PULL WIRES) FOR VOICE/DATA CABLING.

CONTRACTOR SHALL REMOVE & REPLACE EXISTING FIRE ALARM DEVICES, RE-WIRE & TIE-IN TO OWNER'S EXISTING FIRE ALARM SYSTEM (TYPICAL).

CONTRACTOR SHALL RE-WIRE & TIE-IN NEW LIGHTING FIXTURES TO OWNER'S EXISTING ELECTRICAL LIGHTING PANEL/SYSTEM (TYPICAL).

PROVIDE DEDICATED DUPLEX RECEPTACLE FOR COPIER/FAX LOCATION TO BE DETERMINED BY OWNER. WIRE TO PANEL BOARD CIRCUIT AS INDICATED.

PROVIDE DUPLEX RECEPTACLES PER FLOOR PLAN LOCATIONS. REFER TO SCHEDULES FOR MOUNTING HEIGHTS AND FLOOR PLANS FOR EXTENT OF WIRING.

FIELD VERIFY ALL CONDITIONS

THE CONTRACTOR SHALL VISIT THE SITE PRIOR TO BIDDING OR AWARD OF CONTRACT TO INSPECT EXISTING FIELD CONDITIONS. THIS CONTRACT SHALL INCLUDE ALL LABOR AND MATERIALS NECESSARY FOR FIELD MODIFICATIONS DUE TO EXISTING CONDITIONS.

THE CONTRACTOR SHALL CONTACT THE ARCHITECT OR OWNER PRIOR TO BIDDING FOR INTERPRETATIONS AND CLARIFICATIONS OF THE DESIGN AND INCLUDE IN HIS BID ALL COSTS TO MEET THE DESIGN INTENT. CLARIFICATIONS MADE BY THE ARCHITECT OR OWNER AFTER BIDDING WILL BE FINAL AND SHALL BE IMPLEMENTED AT CONTRACTORS COST.

BIDDING CONTRACTORS SHALL HAVE A WORKING KNOWLEDGE OF LOCAL CODES AND ORDINANCES AND SHALL INCLUDE IN THEIR BIDS THE COSTS FOR ALL WORK INSTALLED IN STRICT ACCORDANCE WITH GOVERNING CODES, THE PLANS AND SPECIFICATIONS NOT WITHSTANDING. THE CONTRACTOR SHALL ALERT ARCHITECT OR OWNER OF ANY APPARENT DISCREPANCIES BETWEEN GOVERNING CODES AND DESIGN INTENT.


REFER TO ARCHITECTURAL DRAWINGS FOR ADDITIONAL INFORMATION.

FIRE PROTECTION NOTES

- DRAWINGS ARE DIAGRAMMATIC AND SHOW ONLY SPRINKLER LOCATIONS.
- ALL WORK SHALL BE PERFORMED PER CURRENT APPLICABLE STATE CODES, NFPA 13 STANDARDS, AND PER LOCAL FIRE MARSHAL AND OWNER'S INSURANCE UNDERWRITER REQUIREMENTS.
- FIRE PROTECTION CONTRACTOR SHALL COORDINATE WITH THE WORK OF OTHER TRADES (ARCHITECTURAL CEILING PLAN, ELECTRICAL, AND HVAC ETC.) IN ORDER TO AVOID CONFLICTS WITH THOSE TRADES.
- THE FIRE PROTECTION CONTRACTOR SHALL COORDINATE THE SPRINKLER WORK WITH THE OWNER'S SCHEDULE PRIOR TO COMMENCEMENT OF ANY WORK.
- GENERAL NOTES ARE APPLICABLE TO ALL FIRE PROTECTION DRAWINGS
- FIRE PROTECTION CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING CAST IRON SLEEVE TO ALLOW FIRE STOPPING AROUND SPRINKLER PIPING THAT PENETRATES FIRE RATED WALLS, FLOORS AND CEILINGS.
- FIRE PROTECTION CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A NIGHTWATCH WHILE THE SPRINKLER SYSTEM IS INACTIVE AND ARRANGE HIS WORK TO ALLOW THE SYSTEM TO BE BROUGHT BACK ONLINE AT THE END OF EACH WORKING DAY.
- PROVIDE SEISMIC RESTRAINTS PER CURRENT STATE CODE REQUIREMENTS AND NFPA 13 STANDARDS.
- SPRINKLER CONTRACTOR SHALL PROVIDE PROFESSIONAL ENGINEERING SERVICES AND HYDRAULICALLY CALCULATED SPRINKLER SYSTEM SHOP DRAWINGS AND SHALL SUBMIT SPRINKLER DESIGN TO OWNER'S INSURER FOR APPROVAL. THE SYSTEM SHALL INCLUDE A SAFETY FLOW AND PRESSURE MARGIN OF 10 PERCENT.
- ANY SPRINKLER SERVICE INTERRUPTIONS TO ADJACENT FLOORS AND SPACES MUST BE COORDINATED IN ADVANCE WITH THE OWNER AND KEPT TO A MINIMUM. THIS SHALL ALSO INCLUDE SERVICE INTERRUPTIONS AND CONNECTIONS TO MECHANICAL AND ELECTRICAL SYSTEMS AFFECTING OTHER TRADES. REMOVAL OF EQUIPMENT, ETC. SELECTED WORK MAY BE REQUIRED TO BE DONE DURING 'OFF PEAK' HOURS AT THE OWNER'S DISCRETION.
- FIRE PROTECTION CONTRACTOR ALSO SHALL BE RESPONSIBLE FOR, BUT NOT LIMITED TO THE FOLLOWING:
 - OBTAINING ALL REQUIRED PERMITS
 - INSTALL, TEST AND CLEAN ENTIRE TENANT SPACE SPRINKLER SYSTEM PER THE NFPA 13 STANDARDS
 - PROVIDE ALL EQUIPMENT, SPRINKLERS, PIPE, FITTINGS & VALVES.
 - PIPE SUPPORTS, ANCHORAGE AND SADDLES.
 - PROVIDING AS-BUILT SHOP DRAWINGS AND HYDRAULIC CALCULATIONS STAMPED AND SIGNED BY A REGISTERED PROFESSIONAL ENGINEER IN THE REGULATING STATE.
- THE SPRINKLER CONTRACTOR SHALL REMOVE FROM THE SITE AND PROPERLY DISPOSED OF ALL REMOVED PIPE, FITTINGS, HANGERS, SPRINKLERS, ETC. PER THE DIRECTION OF THE GENERAL CONTRACTOR.
- ALL SPRINKLERS LOCATED IN ORDINARY HAZARD AREAS SHALL BE ORDINARY TEMP.
- SPRINKLER CONTRACTOR SHALL LOCATE SPRINKLERS IN CENTER OF TILE PATTERN WHILE MAINTAINING PROPER COVERAGE AND COORDINATE LOCATIONS WITH FINAL WALL LOCATIONS, CEILING GRID, SOFFITS, CEILING DEVICES, LIGHTS, HVAC DIFFUSERS, GRILLES, ETC..

SPRINKLERS:

- SPRINKLERS SHALL BE MANUFACTURED BY STAR, RELIABLE OR VIKING AND SHALL BE STANDARD RESPONSE WITH ORDINARY TEMPERATURE RATINGS.
- SPRINKLERS IN FINISHED ACOUSTICAL TILE / GYP. BOARD CEILING SHALL BE 'RELIABLE' #4 CONCEALED TYPE WITH WHITE COVER PLATES.
- SPRINKLERS IN FINISH CEILING SHALL BE 'RELIABLE' MODEL '6' PENDENT TYPE WITH CHROME ESCUTCHEONS.

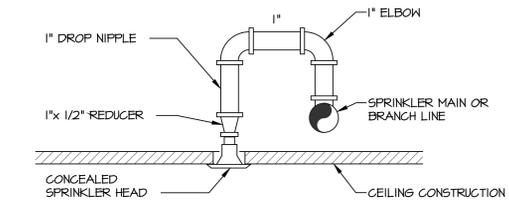


2 RETURN BEND DETAIL
SCALE: NONE

ELECTRICAL SYMBOLS		
ALL SYMBOLS DO NOT NECESSARILY APPLY		
SYMBOL	DESCRIPTION	MOUNTING HEIGHT TO CENTERLINE UNLESS OTHERWISE NOTED
Ⓢ	WALL MOUNTED JUNCTION BOX	SEE DRAWINGS
Ⓜ	CEILING MOUNTED JUNCTION BOX	CEILING
Ⓢ	DUPLEX RECEPTACLE, 3 WIRE GROUND, TYPE, 20A	18" UNLESS NOTED OTHERWISE
Ⓢ _a	DUPLEX RECEPTACLE, 3 WIRE GROUND, TYPE, 20A	12" BELOW COUNTER
Ⓢ _{is}	DUPLEX RECEPTACLE, ISOLATED GROUND, TYPE, 20A	18" UNLESS NOTED OTHERWISE
Ⓢ _{wp}	DUPLEX RECEPTACLE, WEATHERPROOF, 20A	18" UNLESS NOTED OTHERWISE
Ⓢ _{gfi}	GROUND FAULT PROTECTED DUPLEX RECEPTACLE, 20A	42" UNLESS NOTED OTHERWISE
Ⓢ _q	QUADRAPLEX WALL RECEPTACLE, 20A	18" UNLESS NOTED OTHERWISE
Ⓢ _{fc}	FLUSH MOUNTED DUPLEX RECEPTACLE, 20A	F - FLOOR C - CEILING AS REQUIRED
Ⓢ _{lt}	LOW VOLTAGE BUZZER TRANSFORMER	AS REQUIRED
Ⓢ _{st}	TOGGLE SWITCH - SINGLE, 3-WAY, MOTOR RATED	48"
Ⓢ ₂	DATA OUTLET - (2) CATEGORY 6	VERIFY MOUNTING HEIGHT w/ OWNER
Ⓢ ₁	TELEPHONE OUTLET - CATEGORY 5e	18" UNLESS NOTED OTHERWISE
Ⓢ ₂	TELEPHONE/DATA OUTLET - (2) CATEGORY 6 (FOR DATA) AND (1) CATEGORY 5e (FOR VOICE)	18" UNLESS NOTED OTHERWISE
Ⓢ ₄	TELEPHONE/DATA OUTLET - (2) CATEGORY 6 (FOR DATA) AND (2) CATEGORY 5e (FOR VOICE)	18" UNLESS NOTED OTHERWISE
Ⓢ ₂₀₀	200 / 120V POWER PANELBOARD	EXISTING
Ⓢ ₂₇₇	277 / 480V POWER PANELBOARD EXISTING	EXISTING
Ⓢ _{hr}	HOME RUN TO PANELBOARD	
Ⓢ _{ca}	CEILING MOUNTED FIRE ALARM AUDIO/VISUAL SIGNAL DEVICE	CEILING
Ⓢ _{sd}	SMOKE DETECTOR	CEILING MOUNTED

LIGHTING GENERAL NOTES

- THE CONTRACTOR FOR THIS WORK IS REQUIRED TO READ THE SPECIFICATIONS AND REVIEW DRAWINGS OF ALL DIVISIONS OF WORK AND IS RESPONSIBLE FOR THE COORDINATION OF THIS WORK AND THE WORK OF ALL SUBCONTRACTORS WITH ALL DIVISIONS OF WORK. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ALL SUBCONTRACTORS WITH A COMPLETE SET OF BID DOCUMENTS.
- SEE ARCHITECTURAL REFLECTED CEILING PLAN FOR EXACT LOCATION AND QUANTITY OF LIGHTING FIXTURES. EXISTING EMERGENCY LIGHTS, LIGHTING FIXTURES & FIRE ALARM FIXTURES SHALL BE REMOVED, REINSTALLED AND REWIRED PER THE LATEST NATIONAL ELECTRICAL CODE AND ALL LOCAL CODES.
- ELECTRICAL CONTRACTOR SHALL MAKE ALL FINAL CONNECTIONS AS REQUIRED FOR A FULLY COMPLETE AND OPERABLE SYSTEM.
- LIGHTING FIXTURES ARE PENDANT MOUNTED FROM THE CEILING. GENERAL CONTRACTOR TO PROVIDE BLOCKING AT ATTACHMENT POINTS.
- THE ABBREVIATION "A.H.U." REPRESENTS THE AUTHORITY HAVING JURISDICTION. THIS SHALL INCLUDE BUT NOT BE LIMITED TO NATIONAL, STATE AND LOCAL CODES. THE ULTIMATE AUTHORITY SHALL REST WITH THE LOCAL BUILDING OFFICIALS.

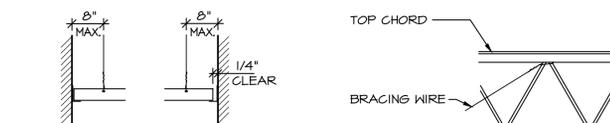


RUNNERS AT WALLS




BRACE AT METAL DECK BRACE @ EXISTING CONCRETE

1 TYPICAL SEISMIC BRACING DETAILS
SCALE: NOT TO SCALE

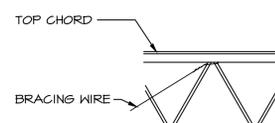

BRACE @ OPEN WEB JOIST

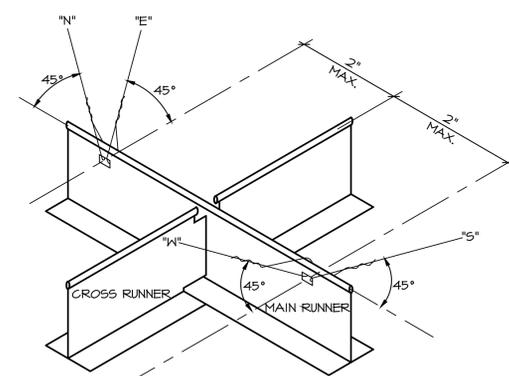

- NOTES:
- #12 GAUGE WIRE BRACING IN PLANE OF EACH RUNNER. VERTICAL ANGLE = 45°
 - HANGER WIRES "N" AND "S" ARE IN THE SAME VERTICAL PLANE AS THE MAIN RUNNER. HANGER WIRES "E" AND "W" ARE IN THE VERTICAL PLANE PERPENDICULAR TO THE MAIN RUNNER.

DATE: 4/17/15
DRAWN BY: PEH
SCALE: AS NOTED
REVIEWED BY: BAK
PROJECT NO.: 14-103A
RII Reference Sheet

REVISIONS	
NO.	DATE DESCRIPTION

**Reference, Schedules,
Details & Notes**

ARCHITECT'S PROJECT NO. 014-103A
RENOVATION TO
LIBRARY OFFICE
MANCHESTER HIGH SCHOOL
134 EAST MIDDLE TURNPIKE
MANCHESTER, CT



281 Farmington Avenue
Farmington, CT. 06032

SHEET NO.

R1.1


NO.	DATE	DESCRIPTION

Demo Plan, Demo Ceiling Plan & Notes

ARCHITECT'S PROJECT NO. 014-103A
 RENOVATION TO
 LIBRARY OFFICE
 MANCHESTER HIGH SCHOOL
 134 EAST MIDDLE TURNPIKE
 MANCHESTER, CT

FR IAR
 ASSOCIATES INC. I

281 Farmington Avenue
 Farmington, CT. 06032
 SHEET NO.
D1.1

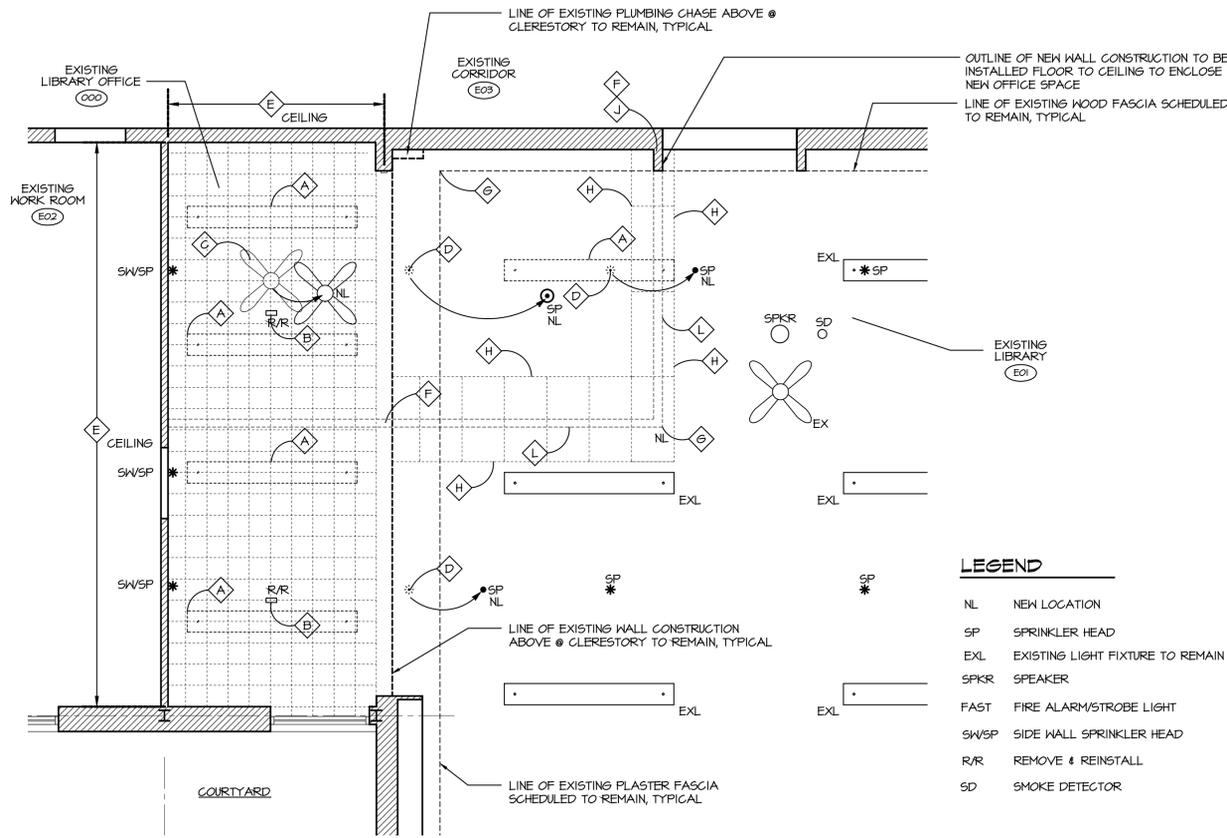

DEMOLITION REFLECTED CEILING PLAN

SCALE: 1/4"=1'-0"

CEILING DEMOLITION NOTES:

KEYED TO DEMO CEILING PLAN

- A REMOVE EXISTING LIGHT FIXTURE, RETAIN EXISTING WIRING & SURFACE RACEWAYS SYSTEM FOR INSTALLATION OF NEW LIGHT FIXTURE.
- B REMOVE & REINSTALL EXISTING EMERGENCY FIRE ALARM/STROBE RETAIN EXISTING WIRING & SURFACE RACEWAYS SYSTEM.
- C REMOVE & REINSTALL EXISTING CEILING FAN RETAIN EXISTING WIRING & SURFACE RACEWAYS SYSTEM.
- D REMOVE EXISTING SPRINKLER HEAD & ASSOCIATED BRANCH PIPING. INSTALL NEW SPRINKLER HEAD & BRANCH PIPING FOR NEW LOCATION.
- E REMOVE EXISTING FIBER TILE CEILING SYSTEM & GLUE DAUBS TO CONCRETE ROOF DECK.
- F REMOVE EXISTING FIBER TILE WALL SYSTEM & GLUE DAUBS TO EXISTING WALL.
- G REMOVE & RELOCATE EXISTING LIGHT SENSOR & ASSOCIATED WIRING TO NEW LOCATION
- H REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING SYSTEM & ASSOCIATED SUSPENSION WIRING TO ALLOW THE INSTALLATION OF THE NEW WALL CONSTRUCTION. REINSTALL EXISTING CEILING SYSTEM, REUSE EXISTING FRAMING, CEILING SYSTEM, CEILING TILES AND/OR PROVIDE NEW FOR COMPLETE CEILING INSTALLATION
- J REMOVE EXISTING METAL RADIATION ENCLOSURE CUT ENCLOSURE IN 2 SECTIONS SIZED TO BUT UP TO NEW WALL CONSTRUCTION. INSTALL WALL AROUND EXISTING STEAM PIPING ALLOWING 3" CLEARANCE FROM EXISTING PIPING. INSTALL FIRE RATED PLYWOOD, FIRE RATED INSULATION IN WALL CAVITY & INSULATE PIPING WITH FIRE RATED 2" THICK INSULATION, TYPICAL EACH SIDE OF NEW WALL SEAL ALL VOIDS.
- K NOT USED
- L REMOVE EXISTING FIBER TILE / SHEET ROCK CEILING SYSTEM & ASSOCIATED GLUE DAUBS (VERIFY IN FIELD). RETAIN EXISTING 2 X 4 WOOD CEILING FRAMING (VERIFY IN FIELD). REFER TO DETAILS 5/A.1 & 6/A.1 FOR EXTENT OF NEW WORK.


INSTALL NEW WALL CONSTRUCTION AROUND EXISTING ELECTRICAL CONDUIT. INSULATE & SEAL ALL VOIDS @ WALL FOR SOUND ISOLATION TYPICAL EACH SIDE OF NEW WALL.

ELECTRICAL DEMOLITION - CONTRACTOR NOTES:

1. VERIFY LIMITS OF DEMOLITION AND REQUIREMENTS WITH OWNER/ARCHITECT.
2. COORDINATE ALL DEMOLITION WITH OWNER'S OPERATIONS MANAGER.
3. ANY RE-USED MATERIAL AND EQUIPMENT MUST BE REFURBISHED TO A "LIKE NEW" CONDITION.
4. DO NOT ABANDON ANY UTILITIES OR MATERIALS WITHIN THE OWNER'S SPACE. REMOVE BACK TO THE SOURCE.
5. COVER RETURN AIR OPENINGS BEFORE AND DURING CONSTRUCTION AS REQ'D.
6. THE SPACE SHALL BE CLEANED DAILY & BE LEFT CLEAN AND FREE OF DEBRIS.

ELECTRICAL DEMOLITION - GENERAL NOTES:

1. ALL WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH ALL NATIONAL, PROVINCIAL, LOCAL CODES & ORDINANCES.
2. DEMOLISHED MATERIAL SHALL BE CONSIDERED TO BE THE PROPERTY OF THE CONTRACTOR AND SHALL BE COMPLETELY REMOVED FROM THE JOB SITE, UNLESS OTHERWISE NOTED.
3. THIS DRAWING DOES NOT DEPICT THE FULL EXTENT OF DEMOLITION. ADDITIONAL ITEMS SCHEDULED FOR DEMOLITION MAY BE FOUND ON OTHER DRAWINGS. GENERAL CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF THIS WORK WITH ALL PARTIES INVOLVED.
4. DEMOLITION CONTRACTOR MUST VERIFY LOCATIONS OF ALL EXISTING STRUCTURAL, MECHANICAL, PLUMBING, FIRE PROTECTION & ELECTRICAL ELEMENTS PRIOR TO START OF DEMOLITION.
5. REMOVE ALL ELECTRICAL LIGHTING FIXTURES, ELECTRICAL RUNS, ASSOCIATED DEVICES. REFER TO CONTRACT DRAWINGS FOR RELATED INFORMATION AND NEW WORK.
6. REMOVE ALL EXISTING CEILING SYSTEMS IN THEIR ENTIRETY INCLUDING SUSPENSION SYSTEMS AT ALL AREAS WHICH ARE SCHEDULED FOR NEW CEILINGS.
7. IF, DURING THE COURSE OF DEMOLITION, ANY ASBESTOS MATERIAL IS SUSPECTED, ALL WORK IS TO STOP IMMEDIATELY AND THE OWNER AND THE ARCHITECT ARE TO BE NOTIFIED.
8. FLOOR PLANS BASED ON "AS-BUILT" DRAWINGS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS, FOR ACTUAL DEVICE TYPE, NUMBER AND LOCATIONS.
9. DEVICES WITH THE INDICATOR "EXL" ARE EXISTING TO REMAIN EXISTING WIRING TO REMAIN. RE-CIRCUIT AS REQUIRED TO COMPLY WITH CONTRACT DRAWINGS

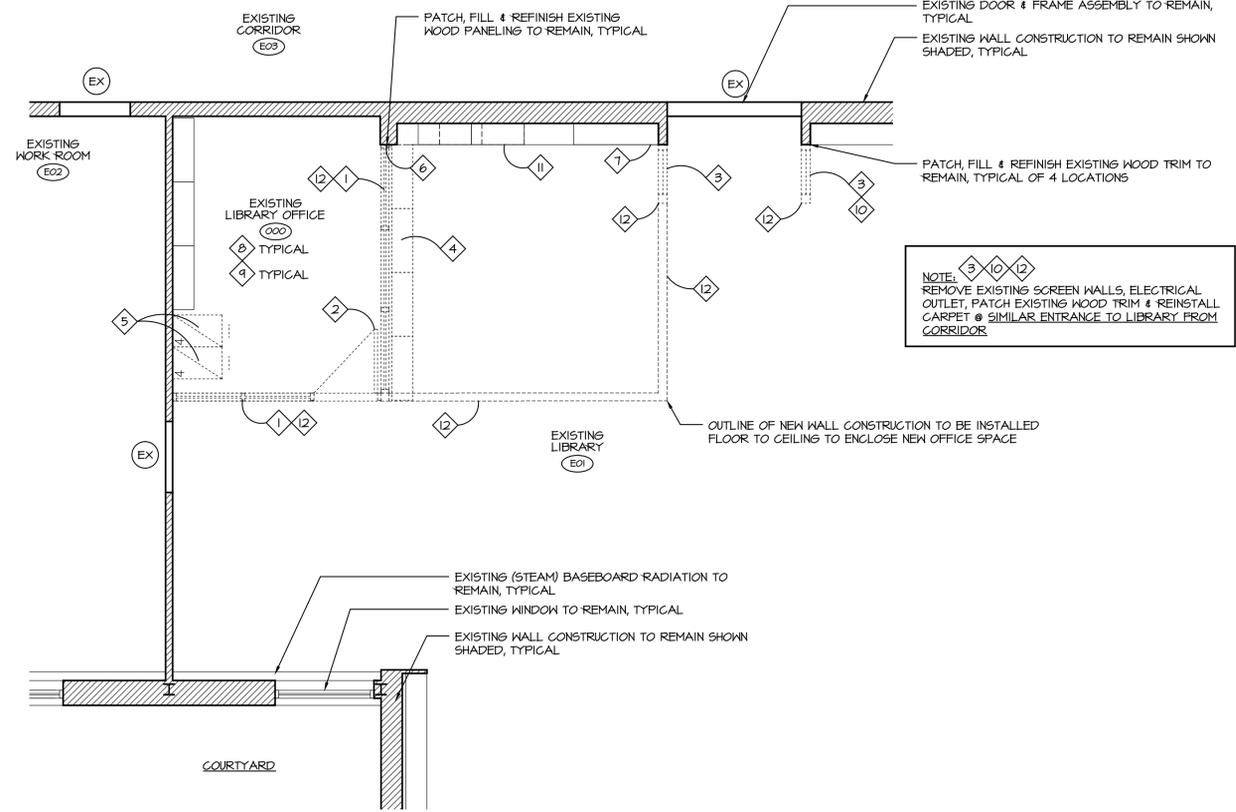

DEMOLITION FLOOR PLAN

SCALE: 1/4"=1'-0"


DEMOLITION NOTES:

KEYED TO DEMO FLOOR PLAN

- 1 REMOVE EXISTING WOOD FRAME WALL CONSTRUCTION, WOOD PANELING & GLAZING COMPLETE FLOOR TO CEILING
- 2 REMOVE EXISTING WOOD DOOR & FRAME
- 3 REMOVE EXISTING WOOD FRAME PARTITION, WOOD PANELING & GLAZING, COMPLETE. RETAIN EXISTING ORIGINAL WOODWORK @ WALL. PATCH, FILL & REFINISH EXISTING WOOD VENEER TO REMAIN, TYPICAL
- 4 REMOVE EXISTING WOOD SHELVING UNITS. PATCH, FILL & REFINISH EXISTING WOOD VENEER TO REMAIN, TYPICAL. SEE FLOOR PLAN FOR NEW LOCATION
- 5 EXISTING WOOD FILING CABINETS TO BE MOVED. SEE FLOOR PLAN FOR NEW LOCATION
- 6 MODIFY EXISTING WOOD SHELVING UNITS FOR NEW LIBRARY OFFICE. PATCH, FILL & REFINISH EXISTING WOOD VENEER TO REMAIN, TYPICAL
- 7 REMOVE & RELOCATE EXISTING THERMOSTAT & ASSOCIATED WIRING TO NEW LOCATION
- 8 REMOVE EXISTING ELECTRICAL OUTLETS, EXISTING WIRING & SURFACE RACEWAYS LOCATED IN THE EXISTING LIBRARY OFFICE. REFER TO FLOOR PLAN FOR NEW ELECTRICAL OUTLET LOCATIONS
- 9 REMOVE EXISTING DATA OUTLETS, EXISTING WIRING & SURFACE RACEWAYS LOCATED IN THE EXISTING LIBRARY OFFICE. REFER TO FLOOR PLAN FOR NEW DATA OUTLET LOCATIONS
- 10 REMOVE EXISTING ELECTRICAL OUTLETS, EXISTING WIRING, & DISCONNECT BACK TO SOURCE. REFER TO FLOOR PLAN FOR NEW ELECTRICAL OUTLET LOCATIONS
- 11 REMOVE EXISTING DATA OUTLETS, EXISTING WIRING & DISCONNECT BACK TO SOURCE. REFER TO FLOOR PLAN FOR NEW DATA OUTLET LOCATIONS
- 12 REMOVE & REINSTALL EXISTING CARPET AT EXISTING WALLS & PARTITIONS SCHEDULE FOR DEMO. REINSTALL EXISTING CARPET & PROVIDE NEW CARPET FOR COMPLETE INSTALLATION. PROTECT CARPET DURING CONSTRUCTION PROCESS


GENERAL DEMOLITION NOTES:

1. ALL WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH ALL NATIONAL, STATE, LOCAL CODES & ORDINANCES
2. THE PLANS ARE DIAGRAMMATIC AND INTENDED TO SHOW THE GENERAL EXTENT OF THE WORK ONLY. THE CONTRACTOR SHALL INCLUDE ALL DEMOLITION WORK REQUIRED TO ACCOMPLISH THE INTENT OF THE PLANS AND SPECIFICATIONS.
3. ALL DEMOLISHED ITEMS SHALL BE REMOVED FROM BUILDING / SITE UNLESS OTHERWISE NOTED. COORDINATE WITH OWNER FOR DELIVERY OF ITEMS NOTED TO REMAIN OWNERS PROPERTY. THE PROJECT SITE/ BUILDING SHALL BE CLEANED OF DEBRIS ON A DAILY BASIS.
4. CONTRACTOR SHALL BE RESPONSIBLE FOR SHORING AND SUPPORT (TEMPORARY OR PERMANENT) FOR ALL PORTIONS OF CONSTRUCTION DURING DEMOLITION AND CONSTRUCTION.
5. ALL ABANDONED MECHANICAL / ELECTRICAL / PLUMBING LINES & TEL/DATA LINES SHALL BE CAPPED OFF BEHIND FINISHES, UNLESS OTHERWISE NOTED.
6. ALL OPENINGS WHERE EXISTING CONSTRUCTION HAS BEEN REMOVED, AND WHICH ARE NOT NOTED TO REMAIN, SHALL BE FILLED AND / OR PATCHED TO MATCH THE ADJACENT EXISTING OR NEW FINISH, INCLUDING ANY FIRE RATINGS REQUIRED.
7. ALL AREAS OF FLOORS, WALLS AND CEILINGS DISTURBED BY DEMOLITION SHALL BE FILLED, PATCHED OR OTHERWISE REFINISHED TO MATCH EXISTING OR NEW FINISH AS DESIGNATED, INCLUDING ALL REQUIRED RATINGS.
8. CONTRACTOR MUST VERIFY LOCATIONS OF ALL EXISTING STRUCTURAL, MECHANICAL, PLUMBING, ELECTRICAL & TEL/DATA ELEMENTS PRIOR TO START OF DEMOLITION.

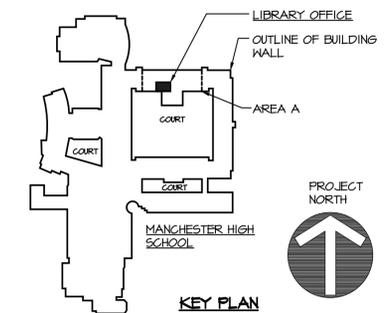

LEGEND

- NL NEW LOCATION
- SP SPRINKLER HEAD
- EXL EXISTING LIGHT FIXTURE TO REMAIN
- SPKR SPEAKER
- FAST FIRE ALARM/STROBE LIGHT
- SW/SP SIDE HALL SPRINKLER HEAD
- R/R REMOVE & REINSTALL
- SD SMOKE DETECTOR



CEILING TYPE SCHEDULE

- EXA EXISTING 2x4 SUSPENDED ACOUSTICAL PANEL & GRID
- EXB EXISTING PLASTER SOFFIT TO REMAIN
- C NEW OPEN METAL CEILING SYSTEM - REFER TO SPECIFICATION SECTION 095000 - METAL CEILING SYSTEMS
- D NEW GYPSUM BOARD CEILING SYSTEM ATTACHED TO EXISTING CONCRETE DECK TO REMAIN

CEILING HEIGHT SCHEDULE

- 1 EX - (10'-0") V.I.F.
- 2 EX - (14'-2") V.I.F.
- 3 10'-3"


NOTE: FIELD VERIFY ALL CEILING HEIGHTS PRIOR TO INSTALLATION OF NEW CONSTRUCTION. COORDINATE INSTALLATION OF NEW LIGHT FIXTURES, SPRINKLER HEADS, WALLS WITH EXISTING STRUCTURE/CONSTRUCTION.

LIGHT FIXTURE SCHEDULE


- (A) 4 FIXTURES, MANUFACTURER: COOPER LIGHTING - CORELITE MODEL: VERTECHS SUSPENDED DIRECT/INDIRECT #VB-KB-2TB-1G-120-RP21-ST-B-DL-1
 - (A1) 1 FIXTURE, MANUFACTURER: COOPER LIGHTING - CORELITE MODEL: VERTECHS SUSPENDED DIRECT/INDIRECT #VB-KB-2TB-1G-120-RP24-TA-B-DL-1
- PROVIDE METAL INFILL PANELS FOR 6"x6" CELLS AT FIXTURE TYPE A1
 PROVIDE STANDARD END CAPS FOR THE NEW LIGHT FIXTURES & REWIRE ALL FIXTURES BACK TO THE EXISTING ELECTRICAL SOURCE. CONCEAL ALL NEW WIRING WITHIN THE NEW CEILING SYSTEMS.

CEILING GENERAL NOTES


- A THIS PLAN INDICATES LAYOUT OF BOTH NEW AND EXISTING CEILING GRIDS. REFER TO CEILING TYPE SCHEDULE.
- B ALL EXISTING SUSPENDED ACOUSTICAL CEILING PANELS, GRID & LIGHTING FIXTURES SHALL BE REMOVED TO ALLOW FOR INSTALLATION OF NEW CONSTRUCTION. STORE ALL CEILING PANELS & GRID FOR RE-INSTALLATION. REINSTALL EXISTING CEILING GRID AND REINSTALL ACOUSTICAL PANELS ANY DAMAGE TO EXISTING PANELS AND GRID SHALL BE REPLACED WITH NEW MATERIALS TO MATCH EXISTING.
- C IN AREAS WHERE EXISTING CEILING GRID OR EXISTING SUSPENDED ACOUSTICAL CEILING IS SCHEDULED TO REMAIN (TYPE EXA), THE CONTRACTOR SHALL REMOVE AND STORE AS MUCH OF THE CEILING SYSTEM AND LIGHTING AS REQUIRED TO ALLOW INSTALLATION OF THE SPRINKLER SYSTEM. REPLACE CEILING MATERIALS AFTER INSTALLATION OF SPRINKLER SYSTEM. ANY DAMAGE TO GRID, MOLDING, TILE, SUSPENSION SYSTEM OR LIGHTING SHALL BE REPLACED WITH NEW MATERIALS TO MATCH EXISTING.
- D IN ALL AREAS OF NEW & EXISTING SUSPENDED ACOUSTICAL CEILING, THE SPRINKLER LINES SHALL BE INSTALLED CONCEALED. REFER TO FIRE PROTECTION DRAWINGS FOR SPRINKLER HEAD LOCATIONS AND RELATED INFORMATION.
- F REFER TO DETAILS (R/L) FOR SEISMIC BRACING DETAILS FOR NEW SUSPENDED CEILINGS.
- G REFER TO DRAWINGS (D/L) FOR CEILING DEMOLITION NOTES.
- H CUT CEILING TILES AS REQUIRED FOR INSTALLATION AROUND NEW OR EXISTING PIPING, SPRINKLER HEADS, SPRINKLER HANGER RODS, CONDUIT, ETC.
- J REMOVE EXISTING CEILING GRID, TILE AND EDGE MOLDING TO ALLOW FOR NEW WALL CONSTRUCTION. PROVIDE NEW CEILING GRID, TILES AND EDGE MOLDING AS REQUIRED. MATCH AND ALIGN WITH EXISTING CEILING.

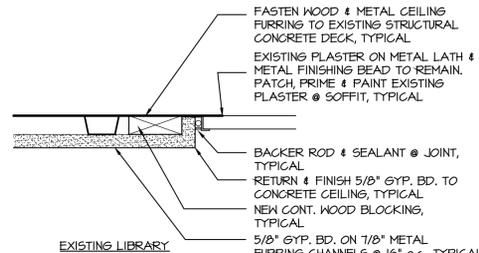


2 CEILING DETAIL
SCALE: 3"=1'-0"

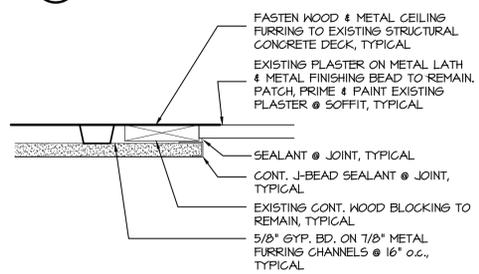

1 CEILING DETAIL
SCALE: 3"=1'-0"

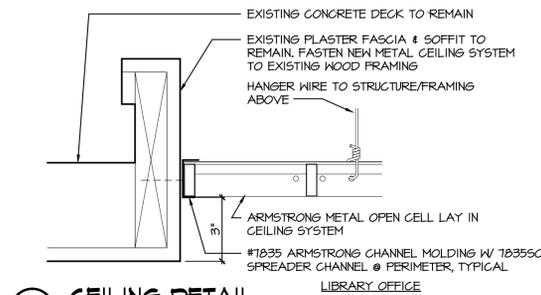


3 CEILING DETAIL
SCALE: 3"=1'-0"

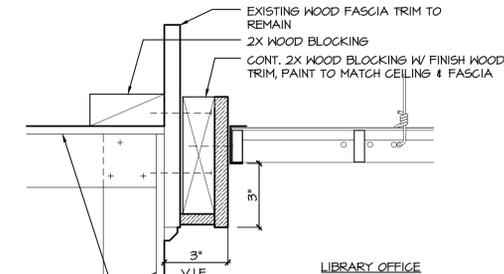

4 CEILING DETAIL
SCALE: 3"=1'-0"

REFER TO CEILING DETAIL 3/A11 FOR SIMILAR NOTES

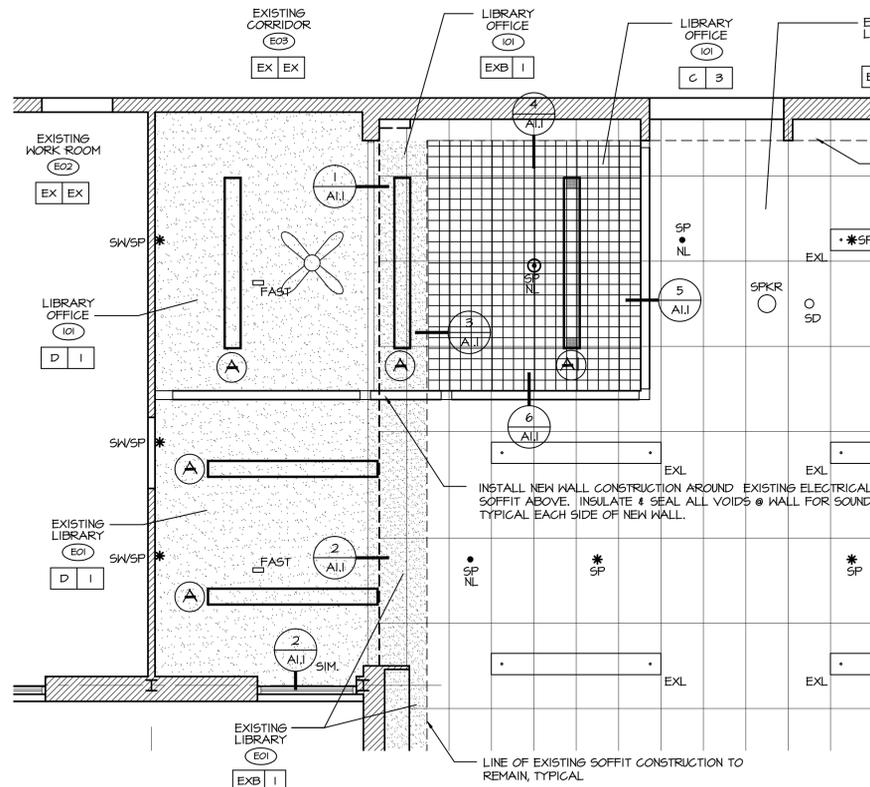


REFLECTED CEILING PLAN
SCALE: 1/4"=1'-0"


FIRE PROTECTION LEGEND

●	CONCEALED SPRINKLER
○	UPRIGHT SPRINKLER
⊙	PENDENT SPRINKLER
*	EXISTING SPRINKLER TO REMAIN


NOTE: REFER TO DETAIL 2/R11 FOR FIRE PROTECTION - RETURN BEND DETAIL FOR NEW AND/OR MODIFIED SPRINKLER HEAD PIPING

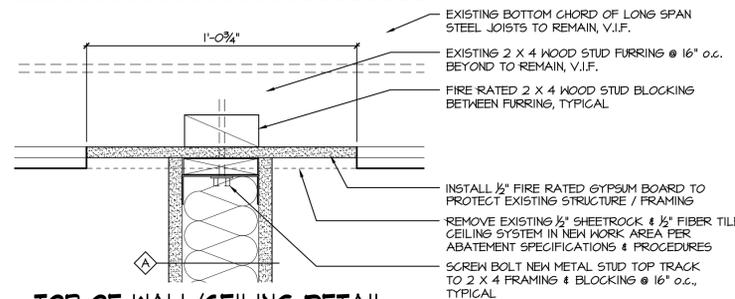

5 TOP OF WALL/CEILING DETAIL PARALLEL TO STEEL JOISTS
SCALE: 3"=1'-0"

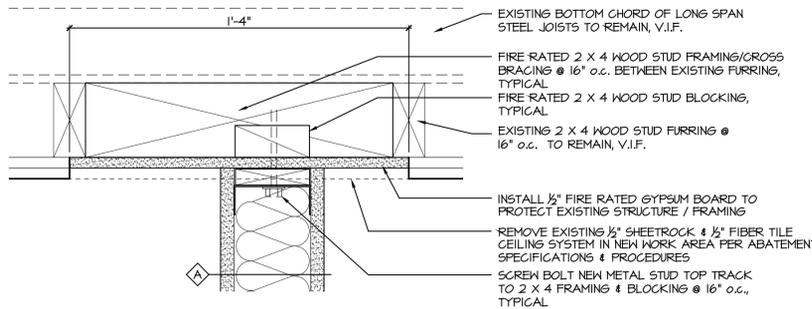


6 TOP OF WALL/CEILING DETAIL PERPENDICULAR TO STEEL JOISTS
SCALE: 3"=1'-0"

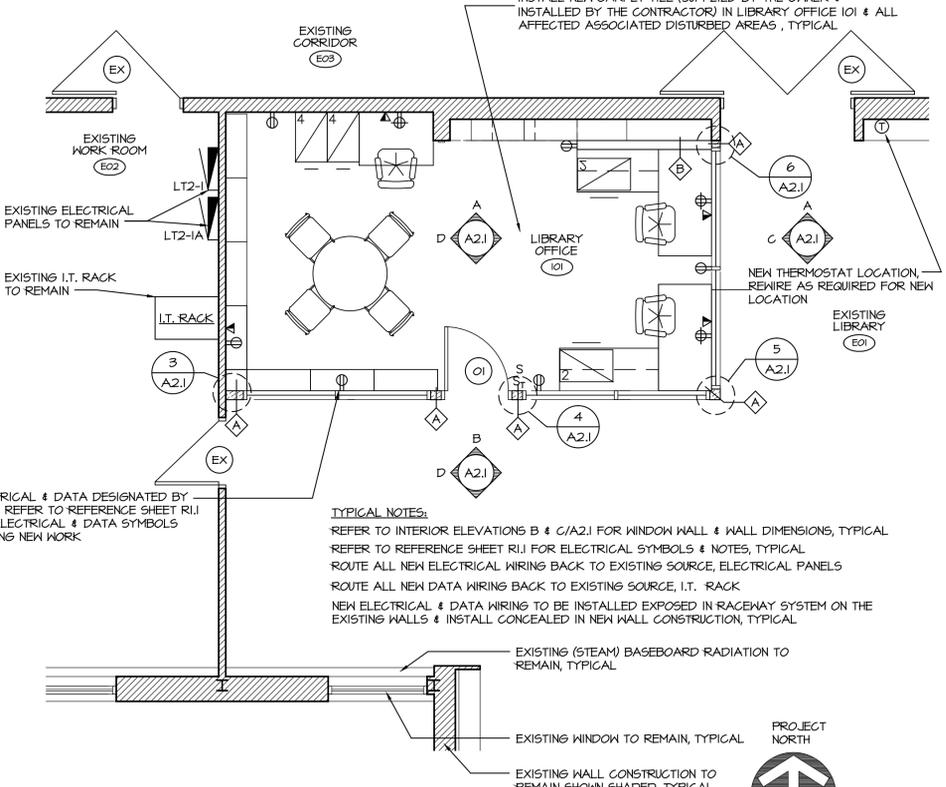


FLOOR PLAN
SCALE: 1/4"=1'-0"

WALL TYPES

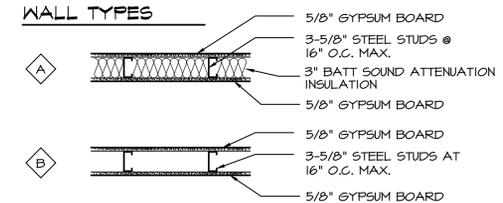

CONSTRUCTION NOTES

- 1 ALL WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH ALL NATIONAL, STATE AND LOCAL CODES AND ORDINANCES.
- 2 DO NOT SCALE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION OF DIMENSIONS FROM THE ARCHITECT BEFORE CONTINUING WITH CONSTRUCTION.
- 3 CONTRACT DRAWINGS MAY VARY FROM ACTUAL FIELD CONDITIONS. CONTRACTOR SHALL CORRECT DIMENSIONS OF ALL MATERIALS TO CARRY OUT THE INTENT OF THE CONTRACT DRAWINGS. VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS IN FIELD BEFORE ORDERING ANY MATERIALS. CONTRACTOR SHALL NOTIFY ARCHITECT PROMPTLY OF ANY CRITICAL DISCREPANCIES BEFORE PROCEEDING WITH WORK.
- 4 ALL NEW WORK SHALL BE IMPLEMENTED SO AS TO PROVIDE A SMOOTH & CONTINUOUS SURFACE WITH ALL EXISTING CONDITIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL WORK NECESSARY TO ACHIEVE THIS REQUIREMENT, EVEN THOUGH PROCEDURES ARE NOT DETAILED FOR EACH SPECIFIC CONDITION OR COMBINATION OF CONDITIONS. QUALITY OF WORKMANSHIP, MATERIALS AND FINISHES SHALL BE EQUAL TO THE LEVEL ESTABLISHED FOR SIMILAR CONSTRUCTION, EXCEPT WHERE EXISTING APPEARANCE IS TO BE MATCHED TO ACHIEVE CONTINUITY.
- 5 CUTTING AND PATCHING SHALL BE THE RESPONSIBILITY OF THE TRADE WHOSE WORK RESULTS IN THE NEED FOR CUTTING AND PATCHING UNLESS A SPECIFIC CONTRACTOR IS CALLED OUT ON THE DRAWINGS. ALL HOLES LEFT BY REMOVING MECHANICAL, PLUMBING AND ELECTRICAL EQUIPMENT, ETC. SHALL BE PATCHED.
- 6 CONTRACTOR SHALL PROVIDE WOOD BLOCKING AT WALLS AS REQUIRED TO SUPPORT SHELVES, CABINETS TV BRACKETS AND RELATED ITEMS.
- 7 WHERE REQUIRED, SEISMIC BRACING SHALL BE PROVIDED AT SUSPENDED CEILINGS.
- 8 ALL PARTITIONS ARE TO EXTEND TO UNDERSIDE OF DECK ABOVE.

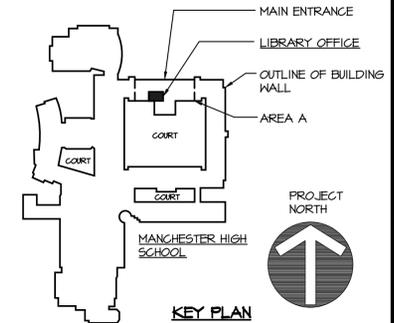

KEY PLAN

DATE: 4/17/15
 DRAWN BY: PEH
 SCALE: AS NOTED
 REVIEWED BY: SRS
 PROJECT NO. 14-103A
 ALL Floor Plan

NO.	DATE	DESCRIPTION

Floor Plan, Ceiling Plan, Notes & Details


ARCHITECT'S PROJECT NO. 014-103A
 RENOVATION TO
 LIBRARY OFFICE
 MANCHESTER HIGH SCHOOL
 134 EAST MIDDLE TURNPIKE
 MANCHESTER, CT

FRIAR ASSOCIATES INC.


281 Farmington Avenue
 Farmington, CT. 06032

SHEET NO.

A1.1

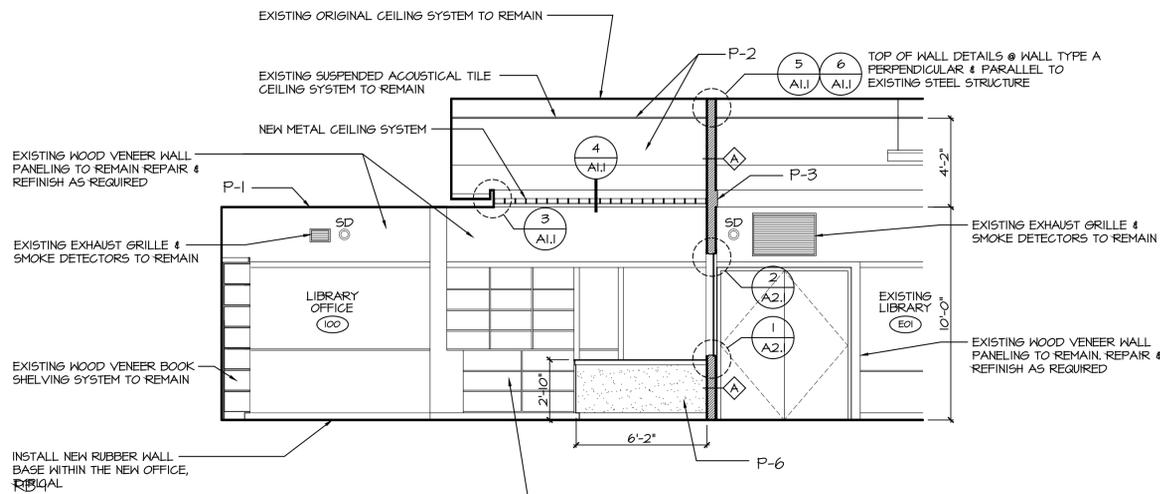

A OFFICE - ELEVATION - NORTH WALL
SCALE: 1/4"=1'-0"

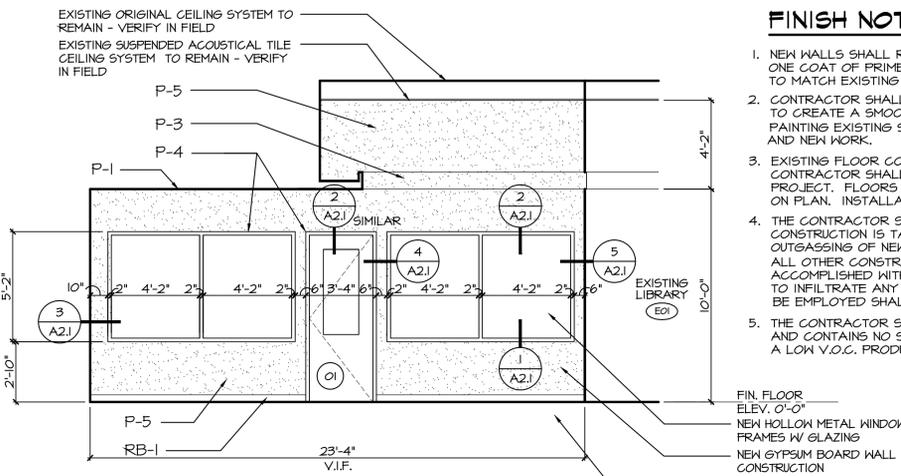

B ELEVATION - SOUTH WALL
SCALE: 1/4"=1'-0"

FINISH NOTES:


- NEW WALLS SHALL RECEIVE THE FOLLOWING: (3) COATS OF COMPOUND & TAPE, SANDED; ONE COAT OF PRIMER, PAINTED WITH (2) COATS NON-ODOR PRODUCING PAINT TO MATCH EXISTING FINISH AS INDICATED.
- CONTRACTOR SHALL PATCH AND REPAIR EXISTING SURFACES WHERE NECESSARY TO CREATE A SMOOTH AND CONTINUOUS SURFACE WITH NEW WORK AND PRIOR TO PAINTING EXISTING SURFACES. CAULK ALL JOINTS BETWEEN EXISTING SURFACES AND NEW WORK.
- EXISTING FLOOR COVERING SHALL BE REMOVED TO ALLOW FOR NEW CONSTRUCTION. CONTRACTOR SHALL PROTECT EXISTING FINISHES TO REMAIN FROM DAMAGE DURING PROJECT. FLOORS ARE TO BE PREPARED TO ACCEPT NEW MATERIALS AS INDICATED ON PLAN. INSTALLATION OF NEW CARPET SHALL MATCH EXISTING.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR VENTILATING THE AREA IN WHICH CONSTRUCTION IS TAKING PLACE TO REMOVE CONTAMINANTS PRODUCED BY OUTGASING OF NEW MATERIALS, THE USE OF ADHESIVES AND SOLVENTS, AND ALL OTHER CONSTRUCTION ACTIVITIES. VENTILATION OF THE SPACE SHALL BE ACCOMPLISHED WITHOUT ALLOWING AIR EXHAUSTED FROM THE CONSTRUCTION AREA TO INFILTRATE ANY OTHER PORTION OF THE FLOOR OR BUILDING. THE METHOD TO BE EMPLOYED SHALL BE APPROVED BY OWNER'S REPRESENTATIVE BEFORE IMPLEMENTATION.
- THE CONTRACTOR SHALL ONLY USE A CARPET ADHESIVE THAT IS ENVIRONMENTALLY SAFE AND CONTAINS NO SOLVENTS, ALCOHOL, GLYCOL, AMMONIA OR CARCINOGENS AND MUST BE A LOW V.O.C. PRODUCT.

FIN. FLOOR ELEV. 0'-0"
NEW HOLLOW METAL WINDOW FRAMES W/ GLAZING
NEW GYPSUM BOARD WALL CONSTRUCTION
NEW RUBBER WALL BASE


FINISH SCHEDULE

CARPET: SUPPLIED BY OWNER INSTALLED BY CONTRACTOR


PAINT:	
P-1	MANUF./PRODUCT NAME: GLIDDEN - ULTRA HIDE 150 INTERIOR FLAT COLOR: CEILING WHITE FINISH: FLAT LOCATION: CEILING
P-2	MANUF./PRODUCT NAME: SHERWIN WILLIAMS COLOR: CYBERSPACE SHT06 FINISH: EGGSHELL LOCATION: CEILING - ABOVE GRID
P-3	MANUF./PRODUCT NAME: GLIDDEN - ULTRA HIDE 150 INTERIOR SEMI-GLOSS COLOR: TO BE DETERMINED (MATCH EXISTING) FINISH: SEMI-GLOSS LOCATION: ACCENT BAND
P-4	MANUF./PRODUCT NAME: DEVCO COATINGS - DEVFLEX HIGH PERFORMANCE WATERBORNE ACRYLIC ENAMEL COLOR: TO BE DETERMINED (TBD) FINISH: SEMI-GLOSS LOCATION: HOLLOW METAL FRAMES
P-5	MANUF./PRODUCT NAME: GLIDDEN - ULTRA HIDE 150 INTERIOR SEMI-GLOSS COLOR: TO BE DETERMINED (MATCH EXISTING) FINISH: SEMI-GLOSS LOCATION: LIBRARY WALL
P-6	MANUF./PRODUCT NAME: GLIDDEN - ULTRA HIDE 150 INTERIOR SEMI-GLOSS COLOR: TO BE DETERMINED (MATCH EXISTING) FINISH: SEMI-GLOSS LOCATION: OFFICE WALL
RUBBER BASE:	
RB-1	MANUFACTURER: JOHNSONITE 4" BASE COLOR: TBD (MATCH EXISTING) LOCATION: LIBRARY WALL/OFFICE WALL
WOOD FINISH:	
PF-1	MANUFACTURER: SHERWIN WILLIAMS COLOR: CLEAR POLYURETHANE FINISH FINISH: SATIN LOCATION: ALL AFFECTED EXISTING WOOD WORK

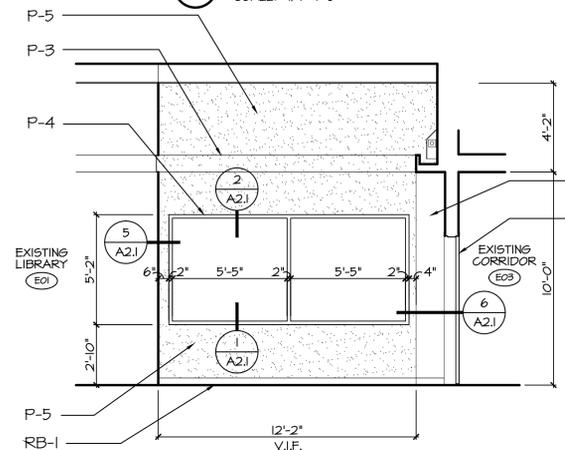


C ELEVATION - EAST WALL
SCALE: 1/4"=1'-0"

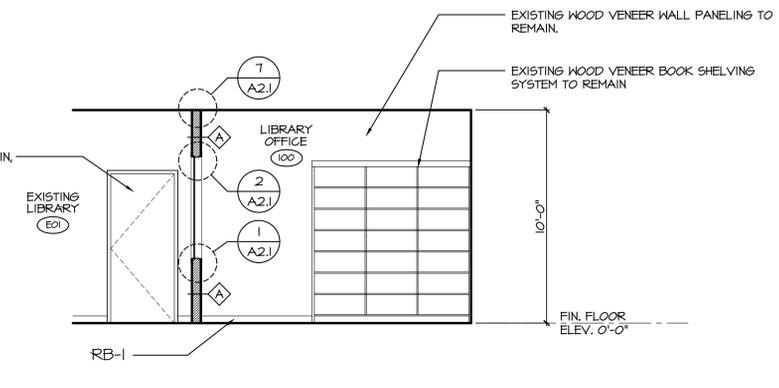


D OFFICE - ELEVATION - WEST WALL
SCALE: 1/4"=1'-0"

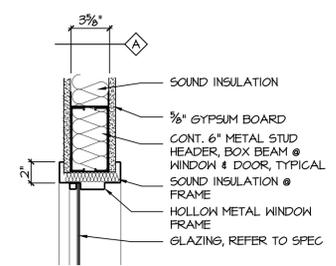


2 HEAD DETAIL
SCALE: 1-1/2"=1'-0"

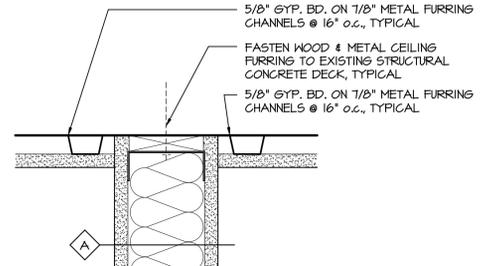


7 CEILING DETAIL
SCALE: 3"=1'-0"

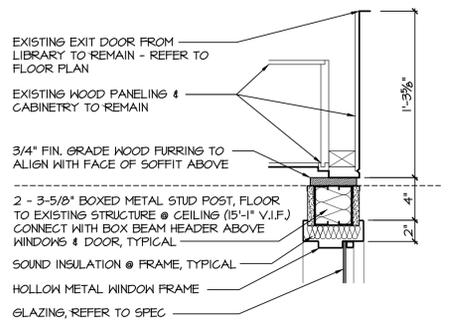


6 JAMB DETAIL @ EXISTING WALL
SCALE: 1-1/2"=1'-0"

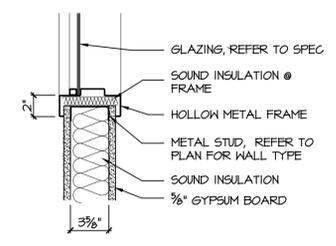


1 SILL DETAIL
SCALE: 1-1/2"=1'-0"

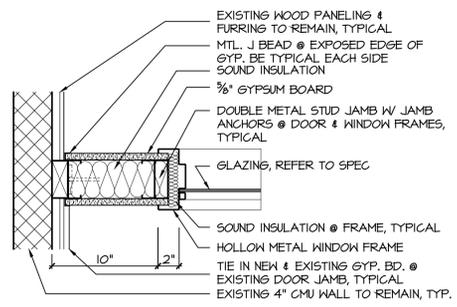

3 JAMB DETAIL
SCALE: 1-1/2"=1'-0"

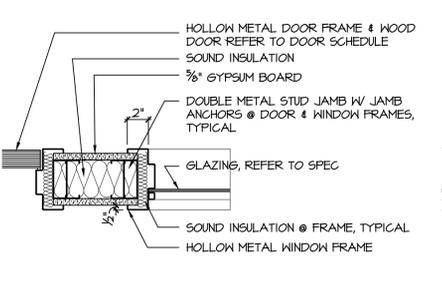

4 JAMB DETAIL
SCALE: 1-1/2"=1'-0"

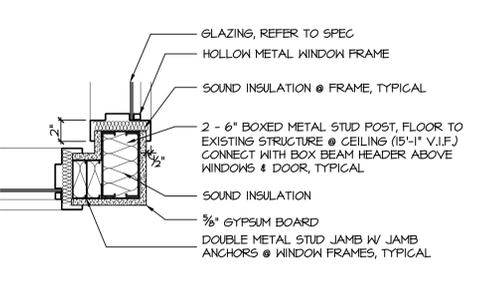

5 JAMB DETAIL @ CORNER
SCALE: 1-1/2"=1'-0"

DOOR AND FRAME SCHEDULE


DOOR NUMBER	NEW DOOR & FRAME	EXISTING DOOR & FRAME	DOOR		FRAME			FIRE RATING	THRESHOLD DETAIL	DOOR HARDWARE					
			SIZE	TYPE	TYPE	HEAD DETAIL	JAMB DETAIL			AUTO CLOSER	POSITIVE LATCHING	DELAYED ACTION CLOSER	LEVER HANDLES	TACTILE WARNING	16" HIGH KICK PLATES
01	●		3'-0"	T-10"	SCW-1	HM-1	2/A2.1 SIM.	4/A2.1	--	--	●	●	●	●	●

DOOR HARDWARE NOTES:


TYPICAL INTERIOR WOOD DOOR & H.M. FRAME - OFFICE DOOR 01 (SCH-1).
36" X 44" SOLID CORE DOOR W/ (16 GA.) STEEL DOOR JAMBS. DOOR LITE GLAZING - SAFETY GLASS. DOOR HARDWARE CLASSROOM FUNCTION LEVER SET, GRADE 2 W/ LCN CLOSER.

TYPICAL DOOR NOTES:

DOOR MANUFACTURER MUST PROVIDE SUFFICIENT REINFORCING FOR ALL DOOR HARDWARE.
INSTALLERS WILL MAKE ANY FINAL ADJUSTMENTS TO ASSURE THE SMOOTH OPERATION OF THE DOOR & DOOR HARDWARE.

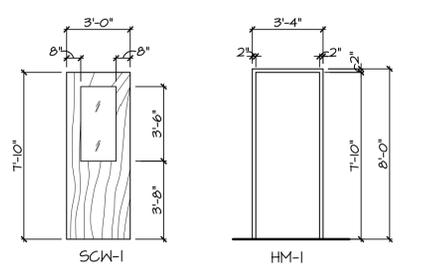

DOOR & FRAME ELEVATIONS
SCALE: 1/4"=1'-0"

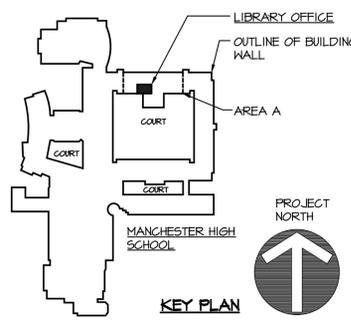

KEY PLAN

DATE: 4/17/15
DRAWN BY: PEH
SCALE: AS NOTED
REVIEWED BY: BRS
PROJECT NO. 14-103A
A2.1 Int. Elevations

REVISIONS

NO.	DATE	DESCRIPTION

**Interior Elevations,
Details & Schedules**

ARCHITECT'S PROJECT NO. 014-103A
RENOVATION TO
LIBRARY OFFICE
MANCHESTER HIGH SCHOOL
134 EAST MIDDLE TURNPIKE
MANCHESTER, CT